

# Acotec Primo line




ACOTEC® stands for advanced construction technology. Only Elematic can offer the original technology for the production of Acotec-walls.



## Acotec Primo line


A compact, highly automated production line that is based on a stationary extruder and is designed to produce hollow-core, light weight non-load-bearing wall elements.

- Requires as little as 900 m<sup>2</sup> of space.
- Makes panels that are non-reinforced as standard, but can also be manufactured with safety wiring to tolerate rough conditions.
- Fast production for a short payback time.
- Easy to use and maintain.

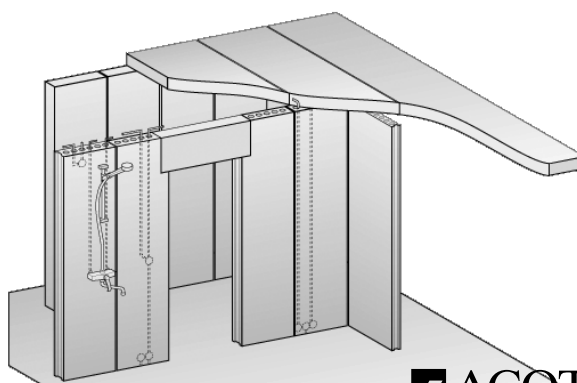

**ACOTEC®**

# Acotec Primo line

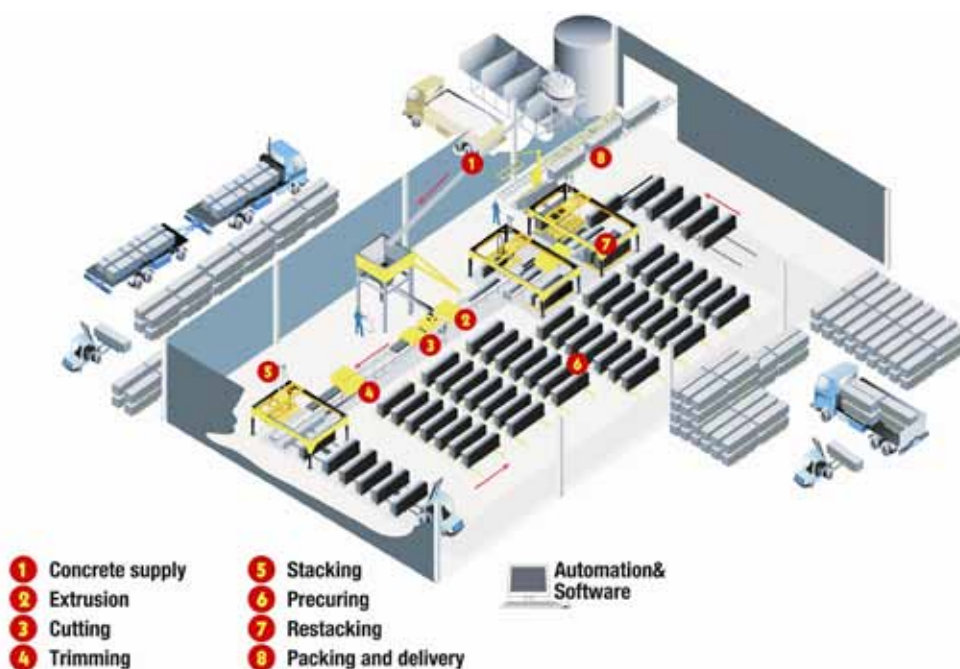

## General data

- Nominal production capacity 80 m<sup>2</sup>/h
- Production personnel 2-4
- Land area 3000 - 5000 m<sup>2</sup>

## Detailed data

Acotec elements are:

- 2500 - 3300 mm long
- 600 mm or 2 X 300 mm wide
- 68 - 120 mm thick
- have 6-8 hollows depending on the thickness

## Acotec is an advantage

- For areas with a high degree of moisture: e.g. bathrooms, kitchens, shower rooms
- Where good sound insulation is needed: e.g. apartments, hotels, schools
- Also with colored concrete, e.g. for fences and boundary walls

## Advantages:

- good profitability
- a quick return on investment,
- a nearly automatic production plant
- flexible production cycles
- economical production costs
- low energy consumption and need
- low labor requirements
- environment-friendly process – silent, non-vibrating, and non-waste.



*Acotec-walls are light, economical, safe, moisture resistant, and fully recyclable.*